



JOB NAME	
Notes	Type TYPE III

FEATURES & SPECIFICATIONS

Construction

Powder coated die-cast housing with a hydroformed aluminum lid. Die-cast aluminum socket provides vertical aiming adjustment complete with degree aiming scale and repositioning stop.

Lens/Gasket

Tempered flat glass lens and gasket with aluminum clamp band.

Optical System

Heavy-gauge anodized aluminum reflector available in Type III.

Ballast

Copper wound factory tested CWA ballast.

Listing

ETL listed for wet locations.

Warranty

One year warranty on the fixture and finish. One year on the ballast and 90 days on the lamps.

EPA Rating


2.00

FLAG POLE LIGHTER SERIES

AGCOMLGT06-B (1,000 Watt)
AGCOMLGT07 (1,500 Watt)



DIMENSIONS

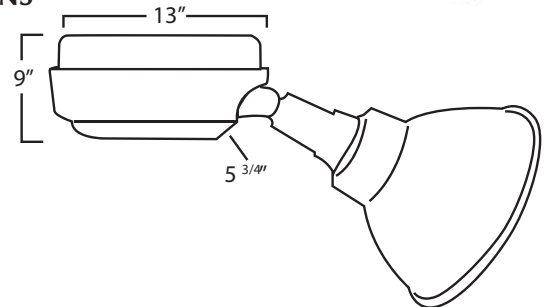


ACCESSORIES (ORDERED SEPARATELY)



FIXTURE/TENON SLIPFITTER



WALL MOUNT SLIPFITTER

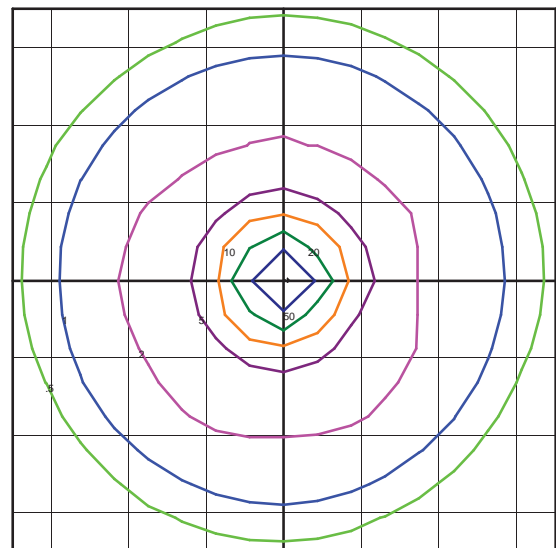

SLS1000MH - 3
Spotlight reflector Type 3, socket position 3 (or D)
MH1000W/UBTS6

Horizontal Footcandles
Scale: 1 Inch = 25 Ft.
Light Loss Factor = 1.00
Total Lumens Per Luminaire = 110000
Mounting Height = 50.00 Ft
Maximum Calculated Value = 229.02 Fc