



Catalog Number

DL-FLKTDLED
Double LED Flagpole Downlighter

FEATURES & SPECIFICATIONS

Heat Sink Housing

The die cast aluminum heat sink has 24 heat dissipating fins to maintain a cool operating LED for maximum life. The fins are independently supported to allow for unobstructed airflow. The fixture is designed to efficiently perform in any mounting orientation. A chromate pretreatment is applied prior to the finishing process to ensure lasting durability. The bullet is finished with a Super Durable Powdercoat Paint with UV inhibitor to make it impervious to atmospheric elements.

Lens Assembly

A high performance flat 120° wide flood provides the most efficient optical assembly in conjunction with the LED light source. The Lens Rings are CNC fabricated from aircraft grade aluminum and the entire unit is sealed together using integral o-rings. The Lens Ring comes standard in a black finish.

Knuckle Mount

The die cast aluminum mount is secured to the heat sink by stainless steel screws and is sealed with an integral o-ring. A 1/2" threaded knuckle is provided standard.

LED



A 20 watt (per bullet) double-source LED Board provides 2000 Lumens of Cool White light (5500K) per bullet.

Driver Box / Transformer



The driver can be mounted up to 500 feet away from the LED Bullet. The amperage draw is .3 amps for 120 volt operation. Three conduit entries are provided at the bottom of the enclosure.



DIMENSIONS



DOUBLE DRIVER BOX DIMENSIONS

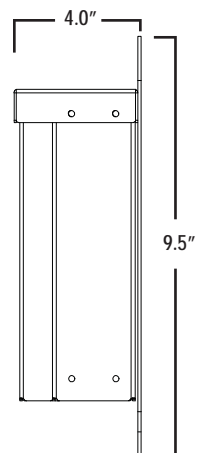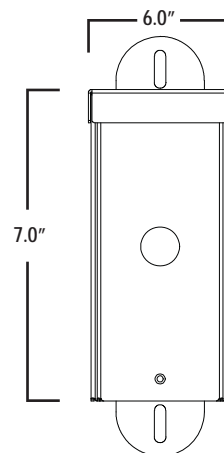

(512) 847-0010
(800) 385-5605
www.EagleMountainFlag.com

PO Box 500 • 333 FM 2325 • Wimberley, Texas 78646